



Excel Security Innovation




MIDI MONITORED SINGLE MAGLOCK 12/24VDC

Midi single lock-monitored magnetic lock. Up to 364kg holding force for indoor applications. Monitoring provides LED lock status indication and relay contacts for signalling.

FEATURES

- Dual voltage
- Surface mount
- Current draw: 500mA @ 12Vdc/ 250mA @ 24Vdc
- Top plate, armature and fixings included
- Silver anodised aluminium
- Lock monitored
- Door status monitoring available
- Up to 364kg (800lb) holding force

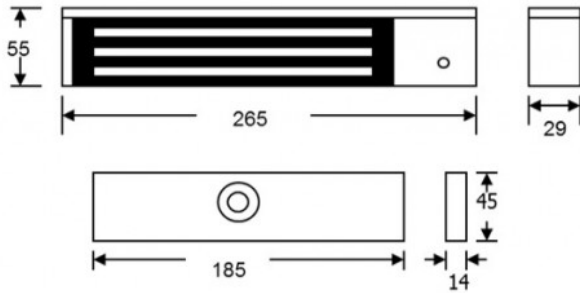

TECHNICAL INFORMATION

- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non condensating
- Weight: 3kg approx.